

1690/1691 Nozzles



Husky® 1690/1691 nozzle is 30% lighter than similar nozzles.

- Nozzle designed with extra large hand opening to accommodate gloves or mittens.
- Check valve is in nozzle body, not the spout, for inexpensive and fast spout replacement.
- Includes a self-adjusting stem packing.
- Automatic shut-off with dual poppets for easy opening.
- 1690 is equipped with two position hold open latch.
- 1691 is not equipped with hold open latch.
- Right angle design allows nozzle to “fit” close to walls and corners.
- Cast-in protective standoffs provide durability with rough usage.



New Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169010N [^]	without shear groove in spout	4.6 (2.0)
169112	with shear groove in spout	4.6 (2.0)

[^] NOT LISTED

Rebuilt Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169410N [^]	without shear groove in spout	4.6 (2.0)

[^] NOT LISTED


New Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
169038N [^]	without shear groove in spout	4.6 (2.0)

[^] NOT LISTED

Construction

Body	Die cast aluminum body
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel
Inlet	1½" NPT and BSPP

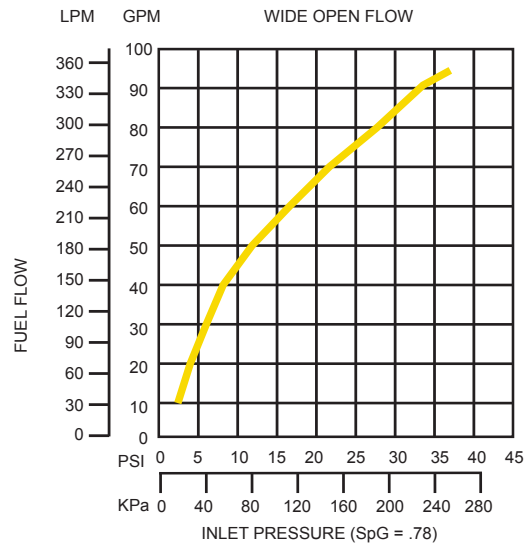

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov