

VIII Nozzles



Automatic shut-off nozzle with polymer handguard for truck stop and other high volume full-service, self-service and unattended stations.

- VIII nozzle shuts off when the gas tank is full.
- Spout is reinforced with thick aluminum bushing that retains spout spring and keeps spout from rounding-in; the two leading causes of clicking off and splash-back spillage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.




New Heavy Duty Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
173310N [^]	with Three Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing	3.9 (1.7)
17331001N [^]	with Three Notch Hold Open Clip, Waffle Splash Guard, Long Spout and Spout Bushing	4.0 (1.8)
173312	without Hold Open Clip, with Waffle Splash Guard and Spout Bushing	3.9 (1.7)
173381N [^]	with Three Notch Hold Open Clip and Spout Bushing without Waffle Splash Guard	3.9 (1.7)
503010N [^]	with Three Notch Hold Open Clip and Waffle Splash Guard without Spout Bushing	3.9 (1.7)
503012	without Hold Open Clip and Spout Bushing, with Waffle Splash Guard	3.9 (1.7)
503081N [^]	with Three Notch Hold Open Clip, without Spout Bushing and Waffle Splash Guard	3.9 (1.7)
50301001N [^]	with Three Notch Hold Open Clip, Long Spout, Waffle Splash Guard, without Spout Bushing	3.9 (1.7)

[^] NOT LISTED

Construction

Body	Aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel
Inlet	1" / 25.4 mm NPT

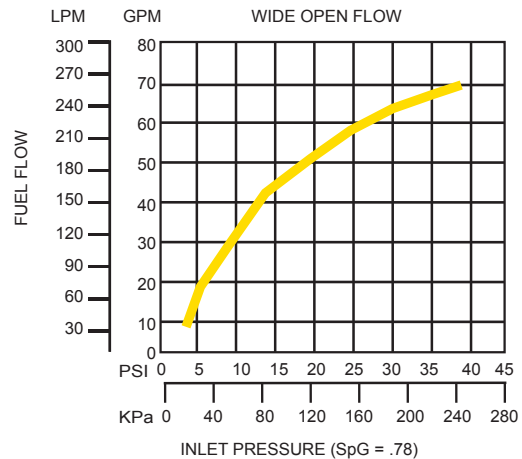

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov