

# VIIIS CW Nozzles



4-10

HIGH VOLUME FUELING

**Pressure activated nozzle with polymer handguard for self-service and unattended stations.**

- VIIIS Nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Contains a poppet disc seal, rated at -40° F/C, to prevent fuel leakage from the main seal in extreme cold weather.
- Contains a poppet disc seal designed to prevent fuel leakage from the main seal in extreme cold weather.
- Spout is reinforced with a thick aluminum bushing that holds the spout spring in place and keeps the spout from rounding in - the two leading causes of clicking-off and splash-back spillage.




## New Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
651910	with Three Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing	4.6 (2.0)
652110	with Three Notch Hold Open Clip and Waffle Splash Guard, without Spout Bushing	4.5 (2.0)
6519159	without Hold Open Clip, with Waffle Splash Guard and Spout Bushing	4.5 (2.0)

## Construction

Body	Aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	LPM 25.4 mm NPT WIDE OPEN FLOW

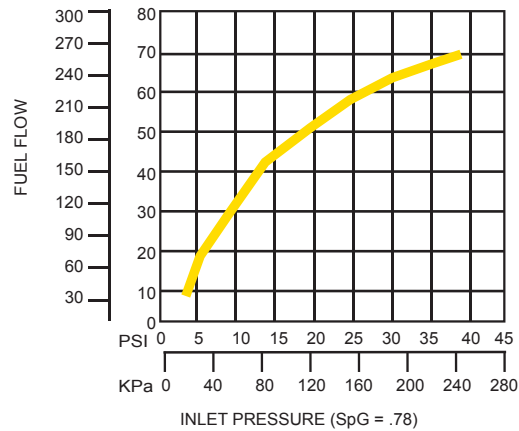

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov